

For More Visit **VU Answer**

## CS502 Final Term Papers by Waqar (File 3)

Question No : 1 of 52

Marks: 1 (Budgeted Time 1 Min)

An optimization problem is one in which you want to find,

Answer ( Please select your correct option )

Not a solution

An algorithm

Good solution

The best solution

ref moazz files

Made by: **Waqar Siddhu**

Question No : 2 of 52

Marks: 1 (Budgeted Time 1 Min)

Suppose that a graph  $G = (V, E)$  is implemented using adjacency lists. What is the complexity of a breadth-first traversal of  $G$ ?

adjacency list requires  $\Theta(n + e)$  storage  
page 116

Answer ( Please select your correct option )

$O(|V|P)$

$O(|V| + |E|)$

$O(|V|P + |E|)$


$O(|V| + |E|)$

Made by: **Waqar Siddhu**

Question No : 3 of 52

Marks: 1 (Budgeted Time 1 Min)

The total degrees of the graph is



Answer ( Please select your correct option )

3

5

6

9

Made by: **Waqar Siddhu**

For More Visit **VU Answer**

Question No : 3 of 52

Marks: 1 (Budgeted Time 1 Min)



Answer ( Please select your correct option )

3

5

6

9

Made by: **Waqar Siddhu**

Question No : 3 of 52

Marks: 1 (Budgeted Time 1 Min)



Answer ( Please select your correct option )

3

5

6

9

Made by: **Waqar Siddhu**

Question No : 4 of 52

Marks: 1 (Budgeted Time 1 Min)

Non-optimal or greedy algorithm for money change takes \_\_\_\_\_

Answer ( Please select your correct option )

$O(k)$  ref moazz

$O(2^k)$

$O(N)$

$O(kN)$

Made by: **Waqar Siddhu**

Question No : 5 of 52

Marks: 1 (Budgeted Time 1 Min)

The Huffman algorithm finds a (n) \_\_\_\_\_ solution.

Answer ( Please select your correct option )

Optimal p 102

Non-optimal

Exponential

Polynomial

**Made by: Waqar Siddhu**

Question No : 6 of 52

Marks: 1 (Budgeted Time 1 Min)

Which formula is used for calculating worst case running time?

Answer ( Please select your correct option )

$T_{worst}(n) = \max_{1 \leq i \leq n} T(i)$  p 13

$T_{worst}(n) = \max_{1 \leq i \leq n} T(i)$

$T_{worst}(n) = \max_{1 \leq i \leq n} T(n)$

$T_{worst}(n) = \max_{1 \leq i \leq n} T(n)$

**Made by: Waqar Siddhu**

Question No : 7 of 52

Marks: 1 (Budgeted Time 1 Min)

The reason for introducing Sieve Technique algorithm is that it illustrates a very important special case of,

Answer ( Please select your correct option )

divide-and-conquer p 34

decrease and conquer

greedy nature

2-dimension Maxima

**Made by: Waqar Siddhu**

Question No : 8 of 52

Marks: 1 (Budgeted Time 1 Min)

Sieve Technique applies to problems where we are interested in finding a single item from a larger set of \_\_\_\_\_

Answer ( Please select your correct option )

n items p 34

phases

pointers

constant

Made by: Waqar Siddhu

Question No : 9 of 52

Marks: 1 (Budgeted Time 1 Min)

The number of nodes in a complete binary tree of height h is

Answer ( Please select your correct option )

$2^{(h+1)} - 1$  p 40

$2 * (h+1) - 1$

$2 * (h+1)$

$((h+1)^2) - 1$

Made by: Waqar Siddhu

Question No : 10 of 52

Marks: 1 (Budgeted Time 1 Min)

If there are  $\Theta(n^2)$  entries in edit distance matrix then the total running time is

Answer ( Please select your correct option )

$\Theta(1)$

$\Theta(n^2)$  ref moazz files

$\Theta(n)$

$\Theta(n \log n)$

Made by: Waqar Siddhu

# For More Visit **VU Answer**

Question No : 11 of 52

Marks: 1 (Budgeted Time 1 Min)

When a recursive algorithm revisits the same problem over and over again, we say that the optimization problem has \_\_\_\_\_ sub-problems.

Answer ( Please select your correct option )

- Overlapping
- Over costing
- Optimized
- None of these not sure

**Made by: Waqar Siddhu**

Question No : 12 of 52

Marks: 1 (Budgeted Time 1 Min)

A  $p \times q$  matrix A can be multiplied with a  $q \times r$  matrix B. The result will be a  $p \times r$  matrix C. There are  $(p \cdot r)$  total entries in C and each takes \_\_\_\_\_ to compute.

Answer ( Please select your correct option )

- $(q)$  p 84
- (1)
- $(r^2)$
- $(r^3)$

**Made by: Waqar Siddhu**

Question No : 13 of 52

Marks: 1 (Budgeted Time 1 Min)

Matrix – Chain – Order is \_\_\_\_\_ than the exponential time method of enumerating all possible parenthesizations and checking each one.

Answer ( Please select your correct option )

- Much more efficient
- Only fractional efficient
- Worst
- Too slow

**Made by: Waqar Siddhu**

# For More Visit **VU Answer**

Question No : 14 of 52

Marks: 1 (Budgeted Time 1 Min)

The recurrence relation of Tower of Hanoi is given below

$$T(n) = \begin{cases} 1 & \text{if } n=1 \\ 2T(n-1)+1 & \text{if } n>1 \end{cases}$$

In order to move a tower of 4 rings from one peg to another, how many ring moves are required?

Answer ( Please select your correct option )

15

7

12

32

Made by: **Waqar Siddhu**

Question No : 15 of 52

Marks: 1 (Budgeted Time 1 Min)

Maximum number of edges in a Directed Graph may be

Answer ( Please select your correct option )

V

2V

Approximately  $[V^2]$

ref moazz files

$V/2$

Made by: **Waqar Siddhu**

Question No : 16 of 52

Marks: 1 (Budgeted Time 1 Min)

An adjacency matrix for a graph

Answer ( Please select your correct option )

always square in shape

It is not necessary for it to be square in shape

not sure

Is square in shape for directed graphs but not for undirected graphs

Is always diagonal matrix

Made by: **Waqar Siddhu**

# For More Visit **VU Answer**

Question No : 17 of 52

Marks: 1 (Budgeted Time 1 Min)

Using ASCII standard the string "ab-#&c" will be encoded \_\_\_\_\_ bytes

Answer ( Please select your correct option )

16

7

6

This string cannot be stored using ASCII standard

**Made by: Waqar Siddhu**

Question No : 18 of 52

Marks: 1 (Budgeted Time 1 Min)

Using Huffman encoding technique the string "a@\$a" will be encoded with \_\_\_\_\_ bits

Answer ( Please select your correct option )

5

6

8

Huffman encoding fail at this string

**Made by: Waqar Siddhu**

Question No : 19 of 52

Marks: 1 (Budgeted Time 1 Min)

In fractional knapsack we sort the

Answer ( Please select your correct option )

Value per unit weight in decreasing order

p 109

Weight per unit value in decreasing order

Value per unit weight in increasing order

Weight per unit value in increasing order

**Made by: Waqar Siddhu**

# For More Visit **VU Answer**

Question No : 20 of 52

Marks: 1 (Budgeted Time 1 Min)

The greedy part of the Huffman encoding algorithm is to first find two nodes with \_\_\_\_\_ frequency.

Answer ( Please select your correct option )

- Larger
- Smallest p 100
- Balance
- Character

**Made by: Waqar Siddhu**

Question No : 21 of 52

Marks: 1 (Budgeted Time 1 Min)

The codeword assigned to characters by the Huffman algorithm have the property

Answer ( Please select your correct option )

- that no codeword is the prefix of any other p 101
- that no codeword is the postfix of any other
- that no codeword is the infix of any other
- that no codeword is neither prefix nor postfix of any other

**Made by: Waqar Siddhu**

Question No : 22 of 52

Marks: 1 (Budgeted Time 1 Min)

In undirected graphs there

Answer ( Please select your correct option )

- are no Cross edges but have forward and back edges
- are only forward edges
- is convention of only back edges p 130
- is convention of forward edges

**Made by: Waqar Siddhu**



Question No : 23 of 52

Marks: 1 (Budgeted Time 1 Min)

In time stamp DFS for the edge  $(u,v)$  if  $f(u) > f(v)$  then

Answer ( Please select your correct option )

- the edge is cross
- the edge is back
- the edge is forward
- the edge is tree or cross or forward p 130

Made by: Waqar Siddhu

Question No : 24 of 52

Marks: 1 (Budgeted Time 1 Min)

Kruskal's algorithm

Answer ( Please select your correct option )

- Choose the best non-cycle edge ref moazz files
- Choose the best tree edge
- Choose the vertex that gives the lightest weight
- Follow the dynamic programming rules for choosing edges

Made by: Waqar Siddhu

Question No : 25 of 52

Marks: 1 (Budgeted Time 1 Min)

In Prim's algorithm we use

Answer ( Please select your correct option )

- Queue data structure
- Priority Queue data structure p 150
- Stack data structure
- Both stack and Queue data structures

Made by: Waqar Siddhu

Question No : 26 of 52

Marks: 1 (Budgeted Time 1 Min)

Adding any edge to a free tree

Answer ( Please select your correct option )

- keeps it the free tree and increases the size of the tree
- creates a unique cycle p 142
- it is not allowed to add the edge in free tree
- creates multiple cycles

**Made by: Waqar Siddhu**

Question No : 27 of 52

Marks: 1 (Budgeted Time 1 Min)

Floyd-Warshall algorithm is

Answer ( Please select your correct option )

- based on greedy approach and allow negative edges
- based on divide and conquer approach and allow negative edges
- based on dynamic programming approach and allow negative cycles
- based on dynamic programming approach and allow negative edges p 161

**Made by: Waqar Siddhu**

Question No : 28 of 52

Marks: 1 (Budgeted Time 1 Min)

Dijkstra's algorithm is used for

Answer ( Please select your correct option )

- calculating multiple source shortest path problems
- calculating Minimum spanning tree
- shortest and Minimum Spanning tree both can be calculated by it
- single source shortest path problems p 154

**Made by: Waqar Siddhu**

Question No : 29 of 52

Marks: 1 (Budgeted Time 1 Min)

Bellman Ford algorithm applies relaxation to every

Answer ( Please select your correct option )

edge of the graph and repeats exactly  $v-1$  times p 160

vertex of the graph and repeats exactly  $E-1$  times

edge of the graph and repeats exactly  $E-1$  times

edge but use the back edges for the completion

Made by: **Waqar Siddhu**

Question No : 30 of 52

Marks: 1 (Budgeted Time 1 Min)

Complexity wise the comparison based merge and quick sort algorithms fall in

Answer ( Please select your correct option )

Deterministic Polynomial class

Non-Deterministic Polynomial class

Quick sort in P class and Merge sort in NP class

Quick sort in NP class and Merge sort in P class

Made by: **Waqar Siddhu**

Question No : 31 of 52

Marks: 1 (Budgeted Time 1 Min)

Running time of Floyd-Warshall algorithm is

Answer ( Please select your correct option )

$\Theta(n^2)$

$\Theta(n^4)$

$\Theta(n^3)$  p 161

$\Theta(3^n)$

Made by: **Waqar Siddhu**

Question No : 32 of 52

Marks: 1 (Budgeted Time 1 Min)

If we can solve a single NP problem in P time

Answer ( Please select your correct option )

All NP-problems can be solved p 173

All P problems can be solved

We cannot predict about the solution of other NP problems

This can be never possible to solve the NP problem in P time

**Made by: Waqar Siddhu**

Question No : 33 of 52

Marks: 1 (Budgeted Time 1 Min)

If a problem is NP-complete

Answer ( Please select your correct option )

it must be in P

it must also be in NP

there is no relation between NP and NP-complete

it can be solved in P time

**Made by: Waqar Siddhu**

Question No : 34 of 52

Marks: 1 (Budgeted Time 1 Min)

3-color problem is known as \_\_\_\_\_

Answer ( Please select your correct option )

P

NPC p 173

Co-NP

P and NP

**Made by: Waqar Siddhu**

# For More Visit **VU Answer**

Question No : 35 of 52

Marks: 1 (Budgeted Time 1 Min)

Clique cover problem arises in applications of \_\_\_\_\_.

Answer ( Please select your correct option )

- Map drawing
- Clustering p 176
- Architectural design
- Clique

**Made by: Waqar Siddhu**

Question No : 36 of 52

Marks: 1 (Budgeted Time 1 Min)

In the 3-coloring problem, for two vertices to be in the same group, they must be not \_\_\_\_\_ to each other.

Answer ( Please select your correct option )

- Apart from
- Far from
- Near to
- Adjacent to p 176

**Made by: Waqar Siddhu**

Question No : 37 of 52

Marks: 1 (Budgeted Time 1 Min)

What is the worst-case time for merge sort to sort an array of n elements?

Answer ( Please select your correct option )

- $O(n \log n)$
- $O(n^2)$
- $O(\log n)$
- $O(n)$

**Made by: Waqar Siddhu**

Question No : 38 of 52

Marks: 1 (Budgeted Time 1 Min)

Search techniques of various algorithms look at \_\_\_\_\_

Answer ( Please select your correct option )

Many possible solutions p 97

Maximum 2 possible solutions

Minimum 2 possible solutions

Sorting solutions

**Made by: Waqar Siddhu**

Question No : 39 of 52

Marks: 1 (Budgeted Time 1 Min)

The Huffman encoding algorithm is a \_\_\_\_\_

Answer ( Please select your correct option )

Dynamic and greedy algorithm

Divide and conquer and greedy algorithm

Greedy algorithm p 99

Dynamic programming algorithm

**Made by: Waqar Siddhu**

Question No : 40 of 52

Marks: 1 (Budgeted Time 1 Min)

Breadth first search is shortest path algorithm that works

Answer ( Please select your correct option )

on un-weighted graphs p 153

on weighted graphs

on both weighted and un-weighted graphs

BFS cannot be used for shortest path problems

**Made by: Waqar Siddhu**

# For More Visit **VU Answer**

Question No : 41 of 52

Marks: 2 (Budgeted Time 4 Min)

What are the essential elements of an algorithm?

Answer ( Please [click here](#) to Add Answer )



Normal Arial 12 B I U

Made by: Waqar Siddhu

Question No : 42 of 52

Marks: 2 (Budgeted Time 4 Min)

What is overall time for Kruskal's algorithm if the graph is sparse?

Answer ( Please [click here](#) to Add Answer )



Normal Arial 12 B I U

Made by: Waqar Siddhu

Question No : 43 of 52

Marks: 2 (Budgeted Time 4 Min)

What is DFS and how does it work?

Answer ( Please [click here](#) to Add Answer )



Normal Arial 12 B I U

Made by: Waqar Siddhu

# For More Visit **VU Answer**

Question No : 44 of 52

Marks: 2 (Budgeted Time 4 Min)

What is Bellman-Ford algorithm's running time?

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*

Question No : 45 of 52

Marks: 3 (Budgeted Time 6 Min)

Explain the following two basic cases according to Floyd-Warshall Algorithm,

1. Don't go through vertex k at all.
2. Do go through vertex k.

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*

Question No : 46 of 52

Marks: 3 (Budgeted Time 6 Min)

Describe 2-d maxima problem in mathematical or algorithmic form.

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*



Question No : 47 of 52

Marks: 3 (Budgeted Time 6 Min)

Describe Minimum Spanning Trees Problem with examples.

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*

Question No : 48 of 52

Marks: 3 (Budgeted Time 6 Min)

Let the adjacency list representation of an undirected graph is given below.  
Is there any isolated vertex? If yes, Name the vertex.  
What general property of the list indicates that the graph has an isolated vertex?

a → b → c → e  
b → a → d

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*

Question No : 48 of 52

Marks: 3 (Budgeted Time 6 Min)

a → b → c → e  
b → a → d  
c → a → d → e → f  
d → b → c → f  
e → a → c → f

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*

Question No : 48 of 52

Marks: 3 (Budgeted Time 6 Min)

b → a → d  
c → a → d → e → f  
d → b → c → f  
e → a → c → f  
f → c → d → e  
g

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*

Question No : 48 of 52

Marks: 3 (Budgeted Time 6 Min)

c → a → d → e → f  
d → b → c → f  
e → a → c → f  
f → c → d → e  
g

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*

Question No : 49 of 52

Marks: 5 (Budgeted Time 10 Min)

You are given the task of laying down new railway lines which will connect all  $n$  cities. Thus for any pair of cities, you will end up with track connecting them. Note that two routes may share the same track; track laid between Lahore and Islamabad can be used to travel in both directions. Your goal is to use the minimum amount of track. How would you achieve the goal now? (Note : consider the scenario carefully and name only the best suited algorithm)

- 1 Dijkstra's algorithm
- 2 Prims Algorithm
- 3 Folloyed Warshal Algorithm

Answer ( Please click here to Add Answer )



Made by: *Waqar Siddhu*

Question No : 49 of 52

Marks: 5 (Budgeted Time 10 Min)

track; track laid between Lahore and Islamabad can be used to travel in both directions. Your goal is to use the minimum amount of track. How would you achieve the goal now? (Note : consider the scenario carefully and name only the best suited algorithm)

1. Dijkstra's algorithm
2. Prims Algorithm
3. Folloyed Warshal Algorithm
4. Bellman Ford Algorithm.

Answer ( Please click here to Add Answer )



Made by: **Waqar Siddhu**

Question No : 50 of 52

Marks: 5 (Budgeted Time 10 Min)

Show the result of time stamped DFS algorithm on the following graph. Take node E as a starting node. [You can show final result in exam software and need not to show all intermediate steps].




Answer ( Please click here to Add Answer )



Made by: **Waqar Siddhu**

Question No : 50 of 52

Marks: 5 (Budgeted Time 10 Min)




Answer ( Please click here to Add Answer )



Made by: **Waqar Siddhu**

Question No : 50 of 52

Marks: 5 (Budgeted Time 10 Min)




Answer ( Please click here to Add Answer )

Rich text editor interface with a toolbar and a large empty text area.

Made by: **Waqar Siddhu**

Question No : 50 of 52

Marks: 5 (Budgeted Time 10 Min)




Answer ( Please click here to Add Answer )

Rich text editor interface with a toolbar and a large empty text area.

Made by: **Waqar Siddhu**

Question No : 50 of 52

Marks: 5 (Budgeted Time 10 Min)



Answer ( Please click here to Add Answer )

Rich text editor interface with a toolbar and a large empty text area.

Made by: **Waqar Siddhu**

# For More Visit **VU Answer**


Question No : 51 of 52

Marks: 5 (Budgeted Time 10 Min)

Develop the running time complexity analysis for the following piece of code. Adopt step wise approach along with asymptotic notation at the end.

```
i=1
while (i < n) {
  i++
}
for ( i=1;i <= n ;i=i*2 )
```

Answer ( Please click here to Add Answer )

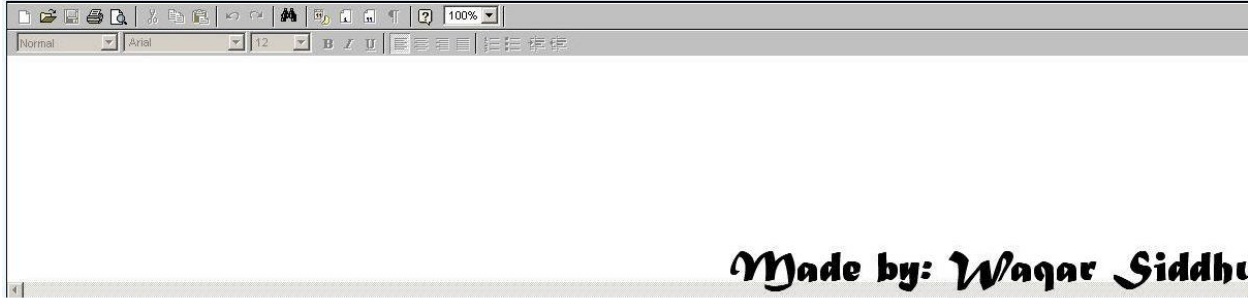

A rich text editor interface with a toolbar at the top containing icons for undo, redo, bold, italic, underline, text color, background color, bulleted list, numbered list, link, unlink, and a search icon. The font is set to Arial, size 12. The main text area is empty. At the bottom right, the text "Made by: Waqar Siddhu" is written in a stylized, bold, black font.

Question No : 51 of 52

Marks: 5 (Budgeted Time 10 Min)

Develop the running time complexity analysis for the following piece of code. Adopt step wise approach along with asymptotic notation at the end.

```
i=1
while (i < n) {
  i++
}
for ( i=1;i <= n ;i=i*2 )
for ( j = 1; j <= i; ++j )
```

Answer ( Please click here to Add Answer )



A rich text editor interface with a toolbar at the top containing icons for undo, redo, bold, italic, underline, text color, background color, bulleted list, numbered list, link, unlink, and a search icon. The font is set to Arial, size 12. The main text area is empty. At the bottom right, the text "Made by: Waqar Siddhu" is written in a stylized, bold, black font.

Question No : 52 of 52

Marks: 5 (Budgeted Time 10 Min)

Kruskal's algorithm can return different spanning trees for the same input graph  $G$  depending upon how ties are broken when edges are sorted. Prove that, for each minimum spanning tree  $T$  of  $G$ , there is a way to sort the edges of  $G$  in Kruskal's algorithm so that the algorithm returns  $T$ .

Answer ( Please click here to Add Answer )



A rich text editor interface with a toolbar at the top containing icons for undo, redo, bold, italic, underline, text color, background color, bulleted list, numbered list, link, unlink, and a search icon. The font is set to Arial, size 12. The main text area is empty. At the bottom right, the text "Made by: Waqar Siddhu" is written in a stylized, bold, black font.

# For More Visit **VU Answer**